



Revision Record					
Control No.	Revision	Description	Date	Drawn	Approved
					Roger
					Roger
					Roger
					Roger

TMAX-1350-XXX-M Molded Power Inductor


Features

-
-
-
-
-
-


Applications

-
-
-
-
-
-


Product Description

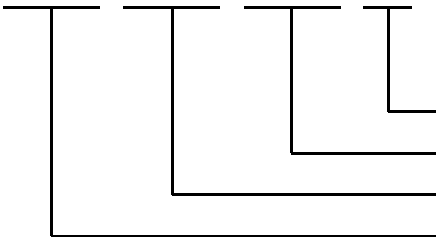

Dimensions

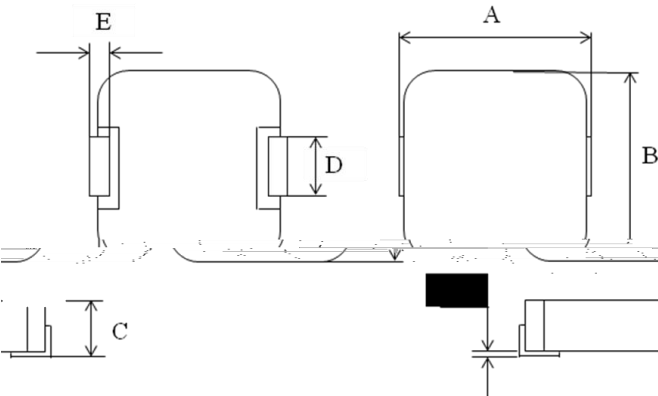


	R68	4R7~470
	13.8Max	
	12.7±0.2	
	5.0 Max.	
	3.7±0.5	5.0±0.5
	2.3±0.5	
	0~0.20	

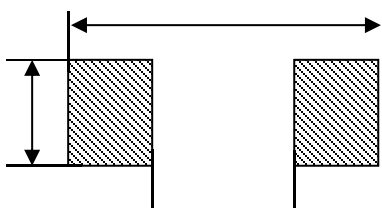Recommend Land Pattern Dimensions



TDG HOLDING CO., LTD.

Notes:

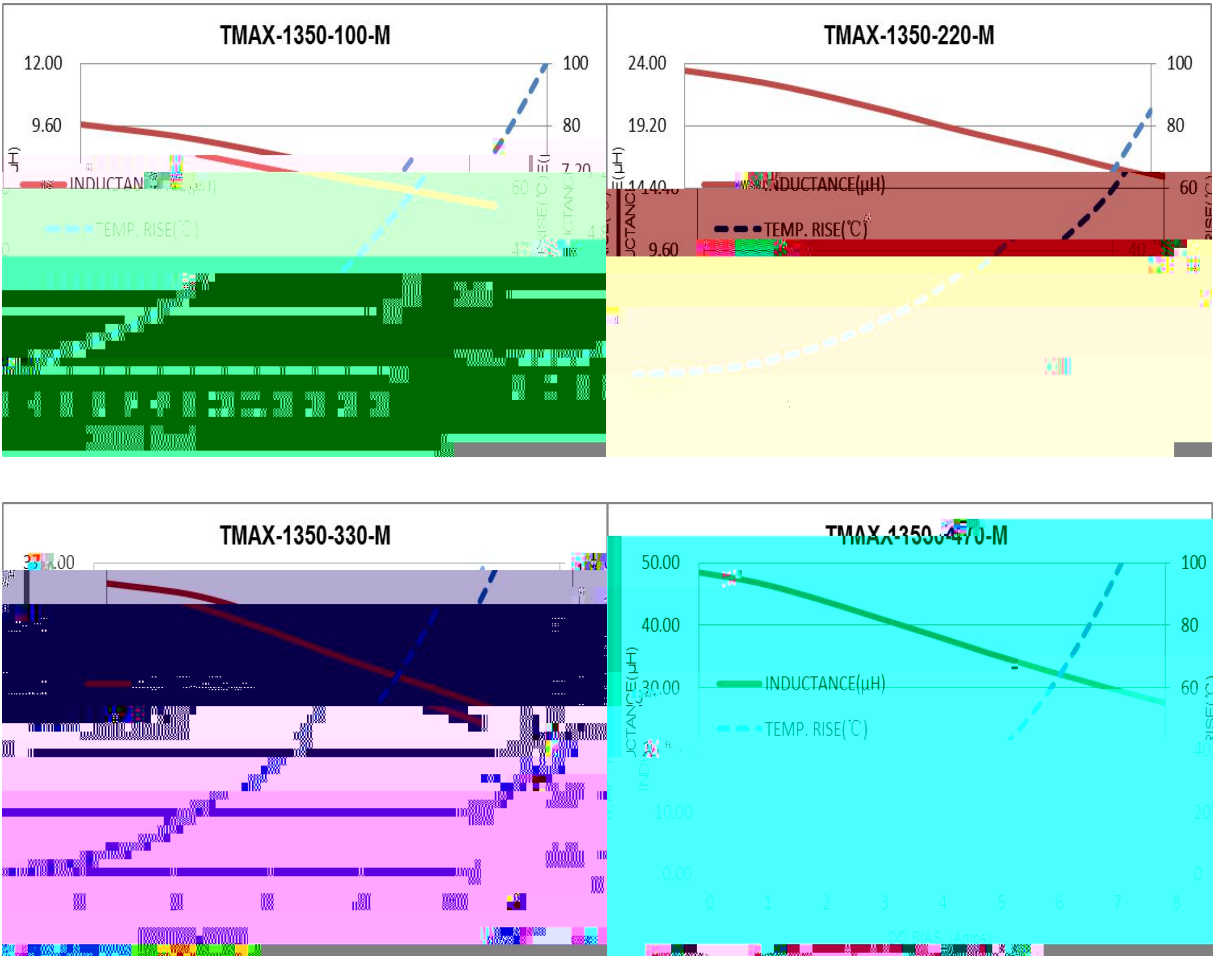

TDG HOLDING CO., LTD.




Reliability:

Item	Test Method	Specification and Requirement
------	-------------	-------------------------------

TDG HOLDING CO., LTD.

Peeling of top cover tape

-
-

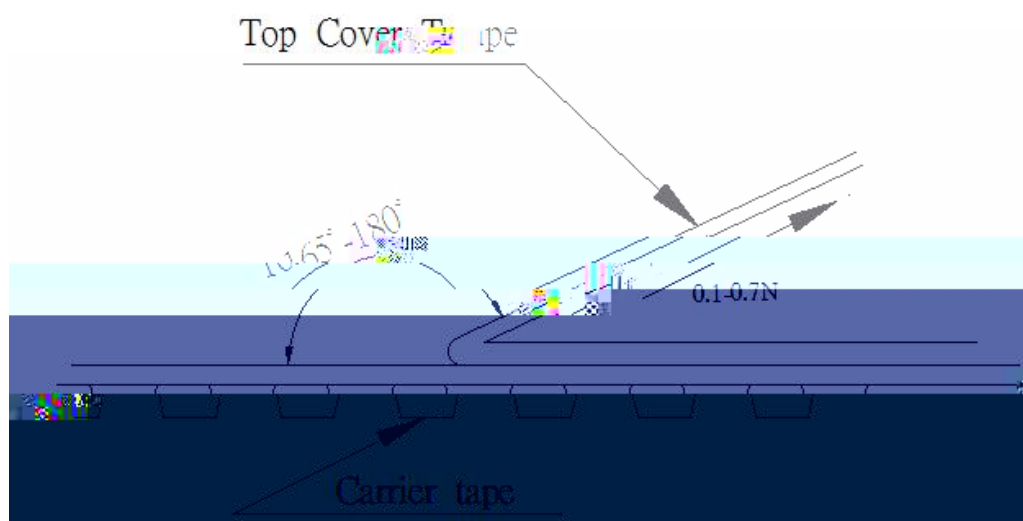

Reflow Profile

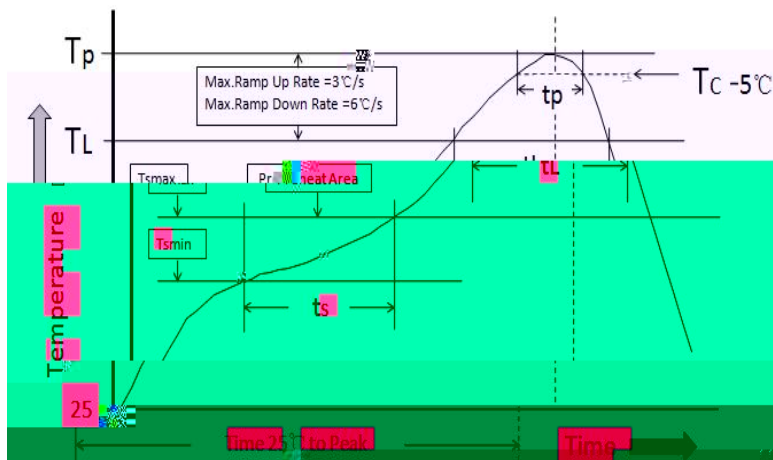


Table1-StandardSnPb Solder(Tc)

Package Thickness	Volume mm ³ 350	Volume mm ³ 350

Table2-Lead(Pb)Free Solder(Tc)

Package Thickness	Volume mm ³ 350	Volume mm ³ 350-2000	Volume mm ³ >2000

Reference JDEC J-STD-020(latest revision)

[illegible]



Numbers of taping

-

Label marking

-
-

Production Label

- ✓
- ✓
- ✓
- ✓
- ✓

Shipping Label

- ✓
- ✓
- ✓
- ✓
- ✓



Care note for Safety

